




TERMINAIS ESFÉRICOS 90°

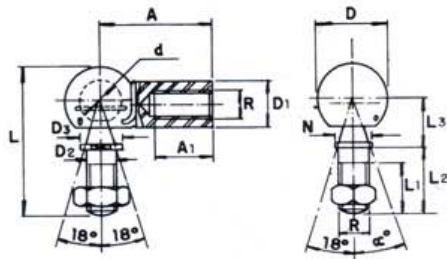


DIN 71802 - FORMA AS

| DIMENSÕES | | | | | | | | | | | | | | | PESO grs. | DESIGNAÇÃO |
|-----------|------|----------------|----------------|----------------|----------|------|----------------|----------------|----------------|----|----------------|----|-----|-------|---------------|------------|
| d | D | D ₁ | D ₂ | D ₃ | R | L | L ₁ | L ₂ | L ₃ | A | A ₁ | N | α° | | | |
| 08 | 12,8 | 8 | 5 | 8 | M 5x0,8 | 25,2 | 6,5 | 10,2 | 9 | 22 | 10,2 | 7 | 10° | 15,5 | TE 08 MND 090 | |
| 10 | 14,8 | 10 | 6 | 10 | M 6x1,0 | 30,2 | 8,5 | 12,5 | 11 | 25 | 11,5 | 8 | 15° | 26,5 | TE 10 MND 090 | |
| 13 | 19,3 | 13 | 8 | 13 | M 8x1,25 | 38,2 | 11,5 | 16,5 | 13 | 30 | 14,0 | 11 | 15° | 54,5 | TE 13 MND 090 | |
| 16 | 24,0 | 16 | 10 | 16 | M 10x1,5 | 47,5 | 13,0 | 20,0 | 16 | 35 | 15,5 | 14 | 15° | 101,0 | TE 16 MND 090 | |
| 19 | 30,0 | 22 | 14 | 19 | M 14x1,5 | 62,5 | 17,5 | 28,0 | 20 | 45 | 21,5 | 17 | 15° | 220,0 | TE 19 MFD 090 | |



TERMINAIS ESFÉRICOS 180°

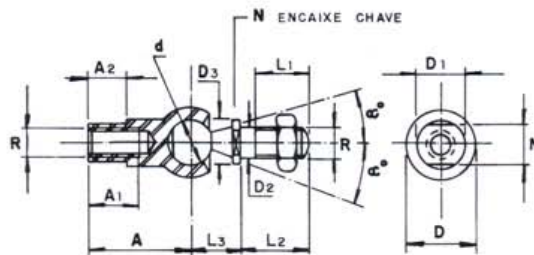

FABRICAÇÃO SOB-CONSULTA
E LOTE MÍNIMO

| DIMENSÕES | | | | | | | | | | | | | | | PESO grs. | DESIGNAÇÃO |
|-----------|------|----------------|----------------|----------------|----------|----------------|----------------|----------------|----|----------------|----------------|----|-----|-----|---------------|------------|
| d | D | D ₁ | D ₂ | D ₃ | R | L ₁ | L ₂ | L ₃ | A | A ₁ | A ₂ | N | α° | | | |
| 08 | 12,8 | 8 | 5 | 8 | M 5x0,8 | 6,5 | 10,2 | 9 | 22 | 10,2 | 7 | 7 | 25° | 14 | TE 08 MND 180 | |
| 10 | 14,8 | 10 | 6 | 10 | M 6x1,0 | 8,5 | 12,5 | 11 | 25 | 11,5 | 9 | 8 | 25° | 25 | TE 10 MND 180 | |
| 13 | 19,3 | 13 | 8 | 13 | M 8x1,25 | 11,5 | 16,5 | 13 | 30 | 14,0 | 11 | 11 | 25° | 53 | TE 13 MND 180 | |
| 16 | 24,0 | 16 | 10 | 16 | M 10x1,5 | 13,0 | 20,0 | 16 | 35 | 15,5 | 14 | 14 | 25° | 100 | TE 16 MND 180 | |
| 19 | 30,0 | 22 | 14 | 19 | M 14x1,5 | 17,5 | 28,0 | 20 | 45 | 21,5 | 17 | 17 | 25° | 218 | TE 19 MFD 180 | |

EXEMPLO DE PEDIDO: P/ ROSCA DIREITA - TE 08 MND 090 - P/ ROSCA ESQUERDA TE 08 MNE 090
P/ ROSCA DIREITA - TE 08 MND 180 - P/ ROSCA ESQUERDA TE 08 MNE 180